

UPDATE TO INSTALLATION INSTRUCTIONS FOR PART NUMBERS 1010 & 1020.

Mirror part number affected: 1020.

Vehicle Model - Pre MY 2003 GMC, Chevrolet and Cadillac vehicles. Problem with installation steps no. 31 and 32- No orange connector on passenger side?

On the passenger side fuse panel, your vehicle may not have an orange connector to attach the passenger side mirror yellow wire.

The yellow wire operates the clearance light function on the mirror, so this needs to be wired into a suitable vehicle circuit.


Extend the yellow wire by another six feet so it can reach the circuit identified in step 31. This means that the yellow wire from both mirrors will be wired into the same circuit.

Mirror part number affected: 1020.


Vehicle Model – Post MY 2003 GMC, Chevrolet and Cadillac vehicles. Problem with installation step no. 30.

There is no need to disassemble the vehicles dash for connection of the yellow clearance light wire. If you attach the yellow wires as outlined in step 30, the mirrors clearance lights will dim with your instrument panel dimmer switch.


To avoid this, after step 29 remove the junction box cover located to the left of the driver's foot brake. The cover can be removed by turning the central black knob off and pulling the cover.

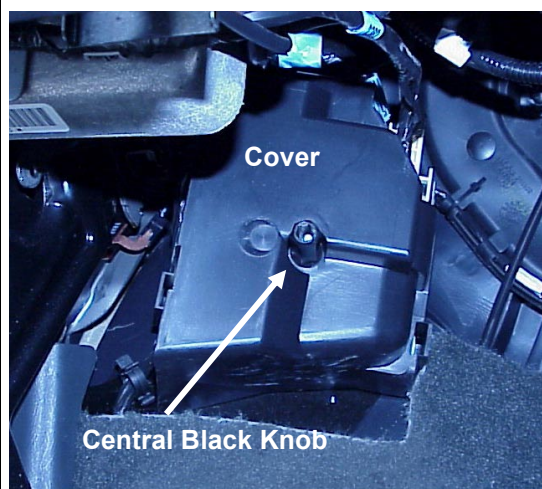

Then remove the junction box from its cradle so you expose and have access to the wires at the rear. This can be done by pushing the two side clips in and lifting the box from its lower support bracket.

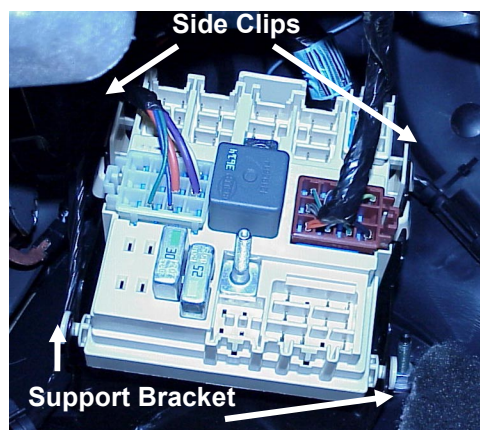

Attach the drivers and passengers side yellow wires to the yellow wire entering the junction box. Then re-mount the junction box to the bracket and replace the cover.

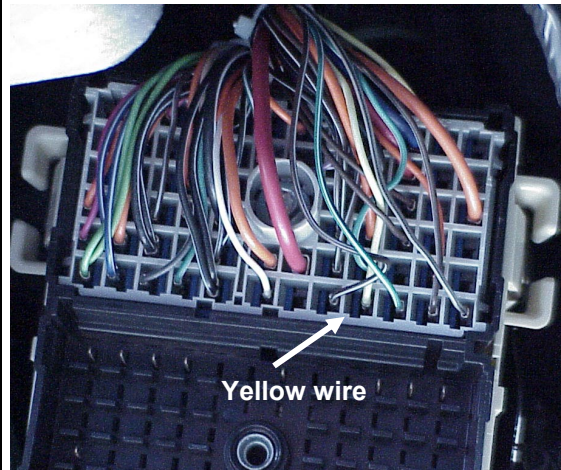

Mirror part number affected: 1010.

Vehicle Model: Pre 2002 GMC, Chevrolet & Cadillac vehicles. Electric and heated factory fitted mirrors that are being replaced by electric and heated TTT mirrors.

For both the drivers and passenger side mirrors, you do not have to remove the inner door trims. Once step 3 is complete, go to step 17, 18 & 19 and then go to step 36.

Mirror part number affected: 1010 & 1020.

Vehicle Model: GMC, Chevrolet & Cadillac vehicles that have the 'Mirror/ Seat Position Recall' and 'Curb View Assist' functions:

If your vehicle is fitted with the above mentioned functions, it is recommended that they are disabled once you fit the TTT mirrors to your vehicle. This is because the mirror will incorrectly adjust the position of the main glass when the memory function is used, and will then need to be re-adjusted back to its correct position.

To avoid this from happening, you will need to disable the 'Seat Position Recall' and 'Curb View Assist' functions. Refer to the 'Driver Information Center' (DIC) section in your vehicles owner manual.

Please also note, that when operating the preset memory function by pushing the buttons on the driver's side door the position of the main glass may move. If you use this function, you may need to re-adjust the glass position prior to driving the vehicle.

Mirror part number affected: 1010 & 1020.

Vehicle Model: GMC, Chevrolet & Cadillac vehicles. Upgrading to the heated glass TTT mirror, if your electric factory fitted mirrors are not equipped with this function.

If your vehicle was not equipped with heated factory fitted mirrors you will need to cut the white wire from the drivers and passenger side mirror connectors and then connect 6 feet of wire to the drivers side white wire and 12 feet of wire to the passengers side white wire. Both of these driver and passenger side wires will then need to be attached to the wire in location number 2 referred to in step 35. Once complete, this will mean the heated glass will remain constantly on when the vehicles ignition is on.

IMPORTANT NOTE: DO NOT MANUALLY ADJUST THE POSITION OF THE MAIN MIRROR GLASS WITH YOUR HAND WHEN THE VEHICLES IGNITION IS ON. THE MIRROR GLASS WILL BE HOT AND MAY CAUSE INJURY IF TOUCHED. ONLY ADJUST

THE POSITION OF THE GLASS WHEN THE VEHICLE IGNITION IS OFF AND THE MIRROR GLASS IS NOT HOT.

Mirror part number affected: 1010 & 1020.

Vehicle Model: Pre MY 2003 GMC, Chevrolet & Cadillac vehicles. Upgrading to the heated glass & lights TTT mirror, if you have manual factory fitted mirrors.

If you have manual factory fitted mirrors you can still upgrade to have the heated glass, turn signal and clearance light functions, despite not being able to have the electrically adjusted glass function.

As outlined in the instructions, follow the steps for the connection of the yellow and red wires. Once complete, cut the white and black wire at the mirror connector and attach 6 feet of wire to each of the drivers side wires and 12 feet of wire to each of the passenger side wires. Connect the black driver and passenger wires to terminal 1 and the white driver and passenger wires to terminal 2, referred to in step 35 of the instructions. Once complete, this will mean the heated glass will remain constantly on when the vehicles ignition is on.

IMPORTANT NOTE: DO NOT MANUALLY ADJUST THE POSITION OF THE MAIN MIRROR GLASS WITH YOUR HAND WHEN THE VEHICLES IGNITION IS ON. THE MIRROR GLASS WILL BE HOT AND MAY CAUSE INJURY IF TOUCHED. ONLY ADJUST THE POSITION OF THE GLASS WHEN THE VEHICLE IGNITION IS OFF AND THE MIRROR GLASS IS NOT HOT.